

規格表與外觀圖形尺寸

型號	TK												
使用流體	壓縮空氣												
容積(L)	70	80	100	120	155	200	250	300	360	430	580	660	
最大使用壓力	8kgf/cm ²			10kgf/cm ²									9kgf/cm ²
材質	黑鋼/米色漆#1733												
板厚(mm)	3			4		5			6		8		
重量(kg)	29	33	41	64	73	81	101	117	135	160	205	225	
IN入口口徑(Rc)	¾					1"			1"¼		2"		
OUT出口口徑(Rc)	¾					1"			1"¼		2"		
安全閥孔口徑(Rc)	¼			½					1"¼				
洩水閥孔口徑(Rc)	¼					½							
壓力錶孔口徑(Rc)	¼												

註2:最大使用壓力可訂製

Technical drawing of a horizontal cylindrical tank. The side view (left) shows a cylinder with a central horizontal line. Labels at the top indicate '入口' (Inlet), '安全閥' (Safety Valve), '壓力錶' (Pressure Gauge), and '出口' (Outlet). The bottom view shows two vertical supports, with labels 'D' for the support height, 'B' for the distance between supports, 'A' for the total length, '洩水閥' (Drain Valve), and 'E固定孔' (Fixed Hole). The end view (right) shows a circular cross-section with a diagonal line indicating the diameter 'Ø直徑' and a label 'E固定孔' for the fixed hole. Dimensions 'C1' and 'C' are shown at the bottom of the end view.

[illegible]

規格表與外觀圖形尺寸

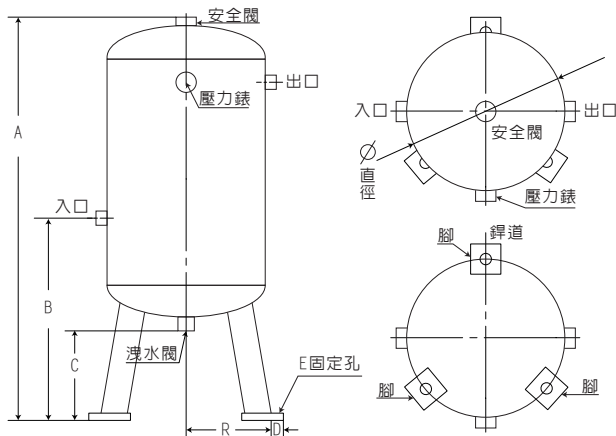
■ TKS 2L~100L規格表

型號	TKS													
使用流體	壓縮空氣													
容積(L)	2	5	10	15	20	25	30	35	45	50	60	70	80	100
最大使用壓力	10kgf/cm ²				9kgf/cm ²				7kgf/cm ²			8kgf/cm ²		
材質	黑鋼/米色漆#1733													
板厚(mm)	3													
重量(kg)	6	8	11	12	15	16	17	18	24	26	29	30	33	41
IN入口口徑(Rc)	¼	¾							½			¾		
OUT出口口徑(Rc)	¼	¾							½			¾		
安全閥孔口徑(Rc)	¼													
洩水閥孔口徑(Rc)	¼													
壓力錶孔口徑(Rc)	¼													

註2:最大使用壓力可訂製

註2:最大使用壓力可訂製

■ TKS 2L~100L外觀圖形尺寸

[illegible]

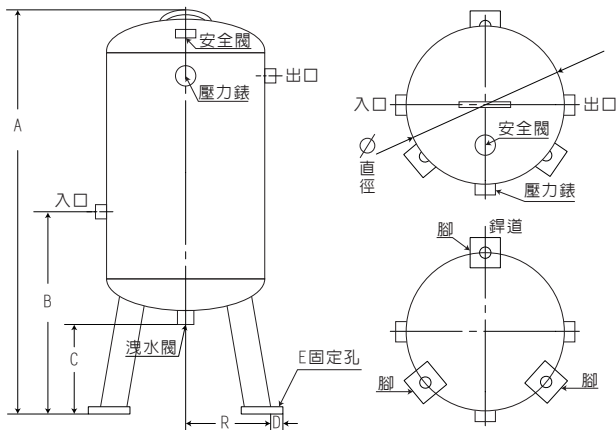
規格表與外觀圖形尺寸

TKS 120L~660L規格表

型號	TKS								
使用流體	壓縮空氣								
容積(L)	120	155	200	250	300	360	430	580	660
最大使用壓力	10kgf/cm ²								9kgf/cm ²
材質	黑鋼/米色漆#1733								
板厚(mm)	4					6		8	
重量(kg)	61	70	78	98	115	132	157	202	222
IN入口口徑(Rc)	¾		1"			1"¼		2"	
OUT出口口徑(Rc)	¾		1"			1"¼		2"	
安全閥孔口徑(Rc)	½					¾		1"¼	
洩水閥孔口徑(Rc)	¼		½						
壓力錶孔口徑(Rc)	¼								

註2:最大使用壓力可訂製

TKS 120L~660L外觀圖形尺寸

[illegible]