

CVF系列-內牙針閥

訂購稱呼代號與規格表


產品特色

- 材質:SUS304/SUS316
- 耐酸鹼、控制流量，負載阻力、壓力緩衝
- 精確調整流量、關斷能力良好
- 擁有多種尺寸可供搭配組合
- 耐壓400Kg
- 工作溫度:
SUS304:-20°C~+80°C
SUS316:-25°C~+180°C

訂購稱呼代號

CVF	3	06T
仕樣	材質	連接口徑
CVF:內牙針閥	無記號:SS304 3:SS316	06T:1/4"PT 10T:3/8"PT 15T:1/2"PT 20T:3/4"PT 25T:1"PT

外觀圖形尺寸

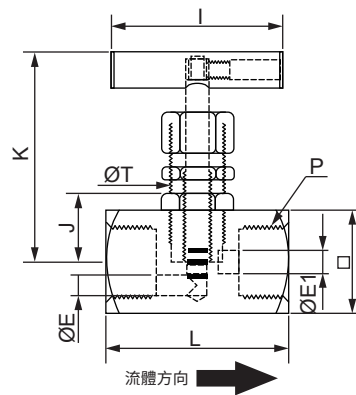

型式	P-PT	ØT	ØE	ØE1	I	J	L	K	□
CVF-06T	1/4"	16.5	4.5	4.5	60	15.7	45	64.5	20
CVF-10T	3/8"	16.5	5.5	5.5	60	18.2	50	64.6	25
CVF-15T	1/2"	22.5	6.4	6.4	60	25.2	65	80.3	30
CVF-20T	3/4"	24.5	8.5	8.5	75	25.7	70	93.7	36
CVF-25T	1"	24.5	8.5	10	75	30.2	80	92.3	45
CVF-3-06T	1/4"	16.5	4.5	4.5	60	15.7	45	64.5	20
CVF-3-10T	3/8"	16.5	5.5	5.5	60	18.2	50	64.6	25
CVF-3-15T	1/2"	22.5	6.4	6.4	60	25.2	65	80.3	30
CVF-3-20T	3/4"	24.5	8.5	8.5	75	25.7	70	93.7	36
CVF-3-25T	1"	24.5	8.5	10	75	30.2	80	92.3	45