



SDXW系列-不銹鋼管氣缸(附金屬刮塵環)

訂購稱呼代號與規格表

◉ 金屬刮塵環










◉ 內部結構圖



◉ 規格表

項目	缸徑 (mm)	Ø20	Ø25	Ø32	Ø40
作動型式		複動式氣缸			
使用流體		已濾清之壓縮空氣			
使用壓力範圍	kgf/cm ² (kPa)	1 ~ 7 (100 ~ 700)			
使用溫度範圍	°C	- 10°C ~ 60°C			
使用速度範圍	mm/s	50 ~ 700			
緩衝裝置		橡膠墊片/氣壓緩衝			
潤滑		自由供給方式			
口徑		PT1/8			PT1/4
磁石裝置		附感應磁石			
標準行程	mm	25, 50, 75, 100, 125, 150, 200, 250, 300			

◉ 訂購稱呼代號

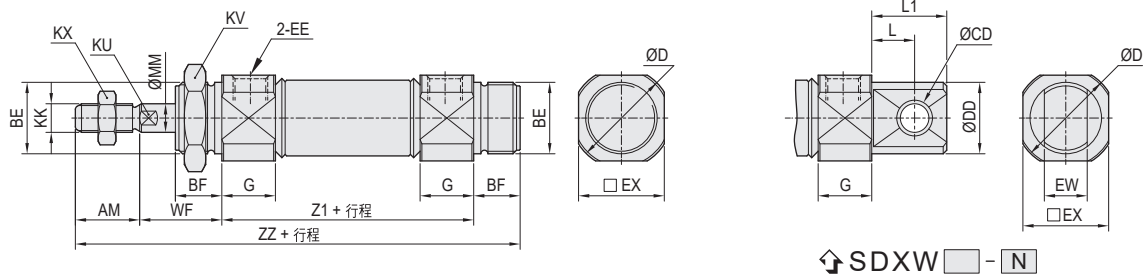
SDX	W 1	25	×	150	-	C	-	SA 2	-	FA
機種仕樣	刮塵裝置	氣缸內徑		氣缸行程		緩衝裝置		感應裝置		固定型式
	W 1 磷青銅材質 W 2 不銹鋼材質	20 - Ø20 mm 25 - Ø25 mm 32 - Ø32 mm 40 - Ø40 mm		25 - 25 mm 50 - 50 mm 75 - 75 mm 100 - 100 mm 125 - 125 mm 150 - 150 mm 200 - 200 mm 250 - 250 mm 300 - 300 mm						 FA  FB  LB  TA  TB  CB
SDX : 標準型						無記號: 無緩衝裝置 [C]: 氣壓緩衝裝置		CS-9D (磁簧管型式) 9D 無記號: 標準型 [SD]: 感應器記號 (CS-9D)		

※ 參照標準製作長度表

SDXW系列-不銹鋼管氣缸 (附金屬刮塵環)

外觀圖形尺寸

◉ 雙動標準型 — SDXW



缸徑 (mm)	AM	BE	BF	CD	D	DD	EE	EX	EW	G	KK	KU	KV	KX	L	L1	MM	WF	Z1	ZM	ZZ
Ø20	18	M20x1.5P	13	8	28	20	PT1/8	24	12	15	M8x1.25P	7	27	14	12	21	8	23	62	108	116
Ø25	22	M26x1.5P	13	8	33.5	22	PT1/8	30	12	15	M10x1.25P	9	32	17	12	21	10	23	62	108	120
Ø32	22	M26x1.5P	13	10	37.5	27	PT1/8	34.5	20	15	M10x1.25P	10	32	17	15	27	12	23	64	110	122
Ø40	24	M32x2.0P	16	10	46.5	33	PT1/4	42.5	20	21.5	M14x1.5P	14	41	22	15	27	16	26	88	140	154