



SDA 系列 — 不銹鋼管氣缸

外觀圖形尺寸

● 雙動標準型 — SDA

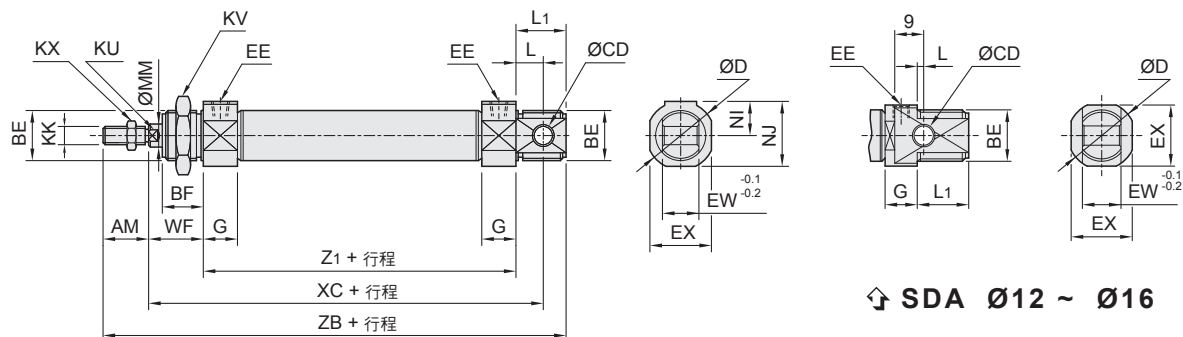


● 雙動平尾型 — K

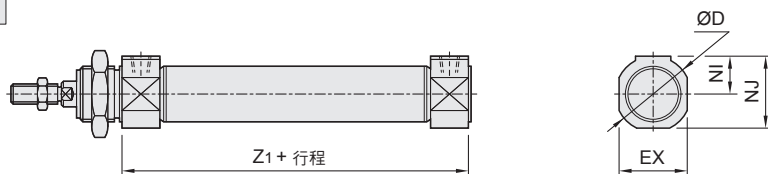


缸徑 (mm)	AM	BE	BF	CD	D	EE	EX	EW	G	KK	KU	KV	KX	L	L1	MM	NI	NJ	WF	XC	Z1	ZB
Ø12	16	M16x1.5	16	6	21	M5	19	12	10	M6x1.0	5	24	12	2	16	6	—	—	22	75	51	105
Ø16	16	M16x1.5	16	6	21	M5	19	12	10	M6x1.0	5	24	12	2	16	6	—	—	22	82	58	112
Ø20	20	M22x1.5	18	8	30	PT 1/8	27	16	15	M8x1.25	7	27	14	12	22	8	15	28.5	24	95	59	125
Ø25	22	M22x1.5	20	8	30	PT 1/8	27	16	16	M10x1.25	9	27	17	12	22	10	15	28.5	28	104	64	136
Ø32	23	M27x2.0	20	10	38	PT 1/8	35	20	16	M10x1.25	10	35	17	15	27	12	19	36.5	28	115	72	150
Ø40	23	M33x2.0	20	10	45	PT 1/8	42	20	16	M14x1.5	14	41	22	15	27	16	22.5	43.5	28	115	72	150

● 雙動雙軸型 — SDAD

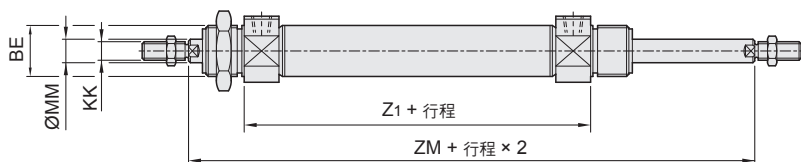

● 可調行程型 — SDAL


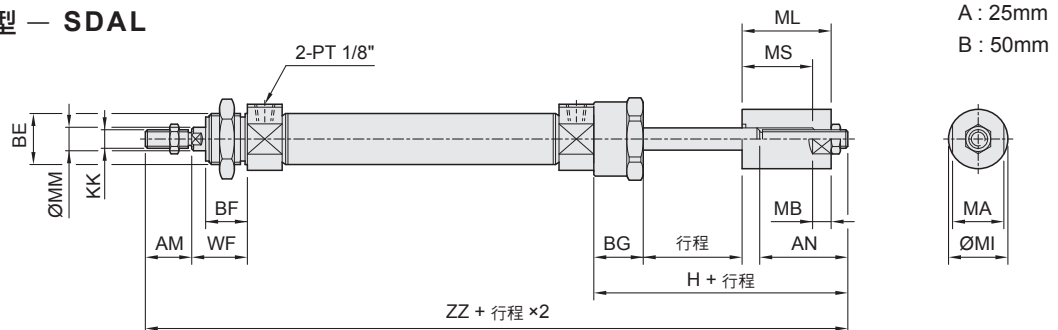


缸徑 (mm)	AN		AM	BE	BF	BG	H		KK	MA	MB	MI	ML		MM	MS		WF	ZZ		ZM
	A	B					A	B					A	B		A	B		A	B	
Ø20	45	70	20	M22x1.5	18	25	78	103	M8x1.25	22	8	24	43	68	8	33	58	24	181	206	107
Ø25	46	71	22	M22x1.5	20	25	79	104	M10x1.25	22	8	24	45	70	10	35	60	28	193	218	120
Ø32	46	71	23	M27x2.0	20	25	79	104	M10x1.25	27	10	29	47	72	12	35	60	28	202	227	128
Ø40	50	75	23	M33x2.0	20	25	83	108	M14x1.5	32	10	35	47	72	16	35	60	28	206	231	128



JDAD 系列－治具氣缸 (可調行程 25mm 氣缸)

外觀圖形尺寸

外牙圖形尺寸

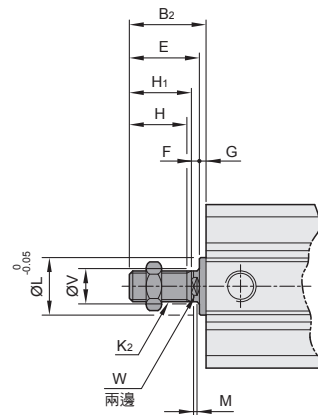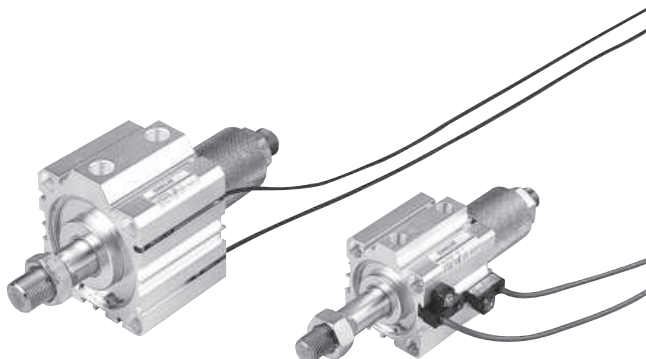

JDAD Ø20 ~ Ø100

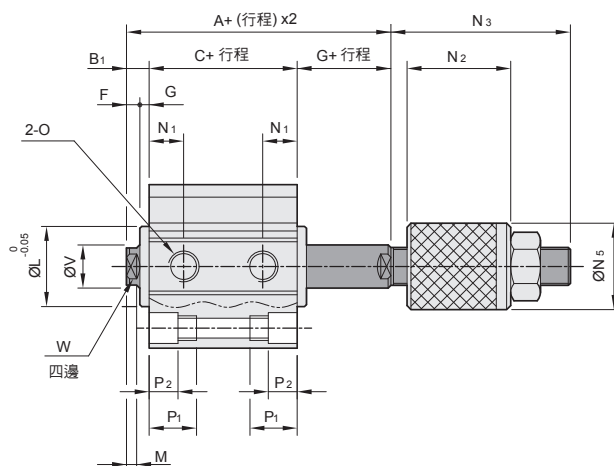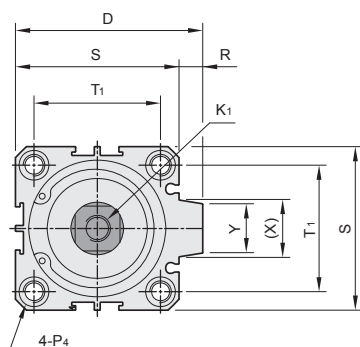

※ 註：標準製作行程：30 (行程可調整 25mm)。



缸徑 (mm)	代號		標準型		附磁石		B ₁	B ₂	D	E	F	G	H	H ₁	K ₁		K ₂	L	M	N ₁	N ₂	N ₃	N ₅
	A	C	A	C	A	C																	
20	26.5	19.5	36.5	29.5	5.5	19.5	—	18	4	1.5	13	14	M4x0.7Px10 深	M6x1P	13	3	7.5	31	38.5	16			
25	29.1	21.2	39.1	31.2	6	22	—	20.1	4.1	1.9	15	16	M5x0.8Px12 深	M8x1.25P	17	3	8	33	42	20			
32	34.3	24	44.3	34	7	24	50	20.7	3.7	3.3	16	17	M6x1Px14 深	M10x1.25P	22	3	9	33	43.5	25			
40	36.8	26.5	46.8	36.5	7	34	58	30.7	3.7	3.3	25	27	M8x1.25Px14 深	M14x1.5P	28	3	10	35	49	32			
50	41.5	28.6	51.5	38.6	9	36	71	32.1	5.1	3.9	25	27	M10x1.5Px15 深	M18x1.5P	38	3	10.85	37	56	36			
63	44.9	32.5	54.9	42.5	8.5	35.5	84.5	31.6	4.6	3.9	25	27	M10x1.5Px15 深	M18x1.5P	40	3	11	37	56	36			
80	57	41.3	67	51.3	10.7	43.7	104	38.7	5.7	5	30	33	M14x1.5Px20 深	M22x1.5P	45	4	13	37	58.5	44			
100	57	45.3	67	55.3	8.7	41.7	124	38.7	5.7	3	30	33	M16x2.0Px20 深	M22x1.5P	45	4	15	37	58.5	44			

缸徑 (mm)	代號	O	P ₄ (固定孔)	P ₁	P ₂	R	S	T ₁	V	W	X	Y
20	M5X0.8	通孔 Ø4.3, 攻牙 M5 x 0.8P x 6 深; 柱孔 Ø7 x 5 深; (兩邊)	11	5	—	34	24	8	6	—	—	
25	M5X0.8	通孔 Ø5.1, 攻牙 M6 x 1P x 8 深; 柱孔 Ø8 x 6 深; (兩邊)	14	6	—	40	28	10	8	—	—	
32	PT 1/8	通孔 Ø5.1, 攻牙 M6 x 1P x 8 深; 柱孔 Ø8 x 6 深; (兩邊)	14	6	6	44	34	12	10	15	13.6	
40	PT 1/8	通孔 Ø6.8, 攻牙 M8 x 1.25P x 10 深; 柱孔 Ø10 x 8 深; (兩邊)	18	8	6	52	40	16	14	15	13.6	
50	PT 1/4	通孔 Ø6.8, 攻牙 M8 x 1.25P x 10 深; 柱孔 Ø11 x 8.5 深; (兩邊)	18.5	8.5	9	62	48	20	17	21.6	19	
63	PT 1/4	通孔 Ø6.8, 攻牙 M8 x 1.25P x 10 深; 柱孔 Ø11 x 8.5 深; (兩邊)	18.5	8.5	9.5	75	60	20	17	23.5	20.5	
80	PT 3/8	通孔 Ø10.4, 攻牙 M12 x 1.75P x 12 深; 柱孔 Ø14 x 10.5 深; (兩邊)	22.5	10.5	10	94	74	25	22	27.6	25	
100	PT 3/8	通孔 Ø12.5, 攻牙 M14 x 2P x 15 深; 柱孔 Ø18.5 x 13 深; (兩邊)	28	13	10	114	90	25	22	27.6	25	



JDAD 系列－治具氣缸 (可調行程 40mm 氣缸)

外觀圖形尺寸

外牙圖形尺寸

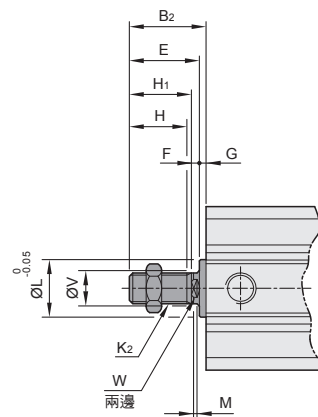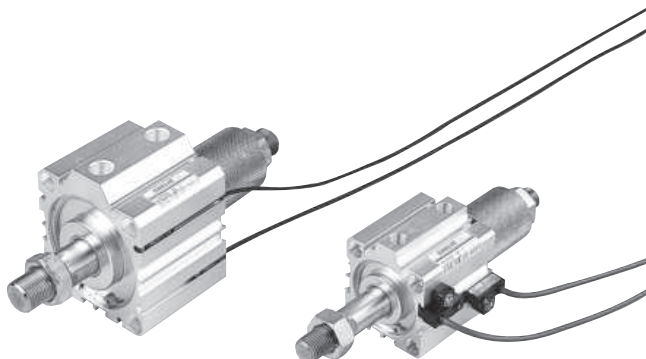

JDAD Ø20 ~ Ø100

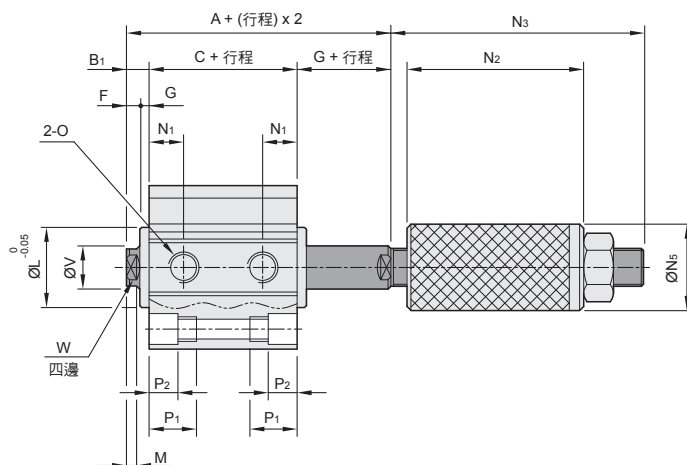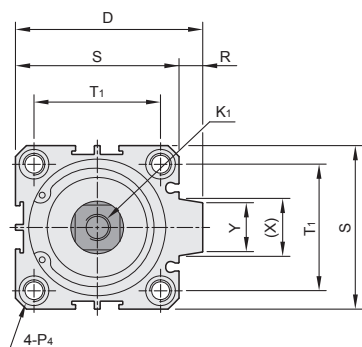

※ 註：標準製作行程：50、75、100 (行程可調整 40mm)。


缸徑 (mm)	代號		標準型		附磁石		B ₁	B ₂	D	E	F	G	H	H ₁	K ₁	K ₂	L	M	N ₁	N ₂	N ₃	N ₅
	A	C	A	C																		
20	26.5	19.5	36.5	29.5	5.5	19.5	—	18	4	1.5	13	14	M4x0.7Px10 深	M6x1P	13	3	7.5	56	63.5	16		
25	29.1	21.2	39.1	31.2	6	22	—	20.1	4.1	1.9	15	16	M5x0.8Px12 深	M8x1.25P	17	3	8	58	67	20		
32	34.3	24	44.3	34	7	24	50	20.7	3.7	3.3	16	17	M6x1Px14 深	M10x1.25P	22	3	9	58	68.5	25		
40	36.8	26.5	46.8	36.5	7	34	58	30.7	3.7	3.3	25	27	M8x1.25Px14 深	M14x1.5P	28	3	10	60	74	32		
50	41.5	28.6	51.5	38.6	9	36	71	32.1	5.1	3.9	25	27	M10x1.5Px15 深	M18x1.5P	38	3	10.85	62	81	36		
63	44.9	32.5	54.9	42.5	8.5	35.5	84.5	31.6	4.6	3.9	25	27	M10x1.5Px15 深	M18x1.5P	40	3	11	62	81	36		
80	57	41.3	67	51.3	10.7	43.7	104	38.7	5.7	5	30	33	M14x1.5Px20 深	M22x1.5P	45	4	13	62	83.5	44		
100	57	45.3	67	55.3	8.7	41.7	124	38.7	5.7	3	30	33	M16x2.0Px20 深	M22x1.5P	45	4	15	62	83.5	44		

缸徑 (mm)	代號	O	P ₄ (固定孔)	P ₁	P ₂	R	S	T ₁	V	W	X	Y
20	M5X0.8P	通孔 Ø4.3, 攻牙 M5 x 0.8P x 6 深; 柱孔 Ø7 x 5 深; (兩邊)		11	5	—	34	24	8	6	—	—
25	M5X0.8P	通孔 Ø5.1, 攻牙 M6 x 1P x 8 深; 柱孔 Ø8 x 6 深; (兩邊)		14	6	—	40	28	10	8	—	—
32	PT 1/8	通孔 Ø5.1, 攻牙 M6 x 1P x 8 深; 柱孔 Ø8 x 6 深; (兩邊)		14	6	6	44	34	12	10	15	13.6
40	PT 1/8	通孔 Ø6.8, 攻牙 M8 x 1.25P x 10 深; 柱孔 Ø10 x 8 深; (兩邊)		18	8	6	52	40	16	14	15	13.6
50	PT 1/4	通孔 Ø6.8, 攻牙 M8 x 1.25P x 10 深; 柱孔 Ø11 x 8.5 深; (兩邊)		18.5	8.5	9	62	48	20	17	21.6	19
63	PT 1/4	通孔 Ø6.8, 攻牙 M8 x 1.25P x 10 深; 柱孔 Ø11 x 8.5 深; (兩邊)		18.5	8.5	9.5	75	60	20	17	23.5	20.5
80	PT 3/8	通孔 Ø10.4, 攻牙 M12 x 1.75P x 12 深; 柱孔 Ø14 x 10.5 深; (兩邊)		22.5	10.5	10	94	74	25	22	27.6	25
100	PT 3/8	通孔 Ø12.5, 攻牙 M14 x 2P x 15 深; 柱孔 Ø18.5 x 13 深; (兩邊)		28	13	10	114	90	25	22	27.6	25


DN 系列 標準型氣缸 (双活塞迫緊型)

外觀圖形尺寸-DND，DNL，FA，FB 系列

双軸型 - DND

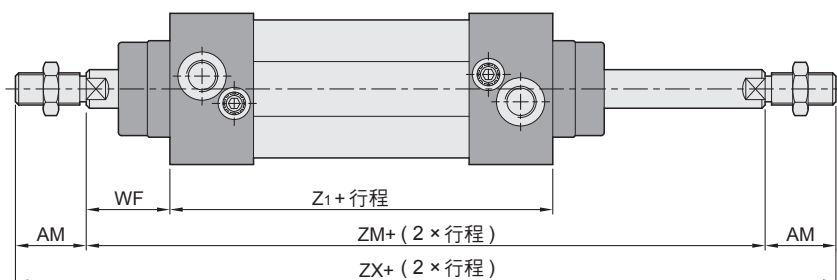


双軸可調行程型 - DNL A : 25mm B : 50mm

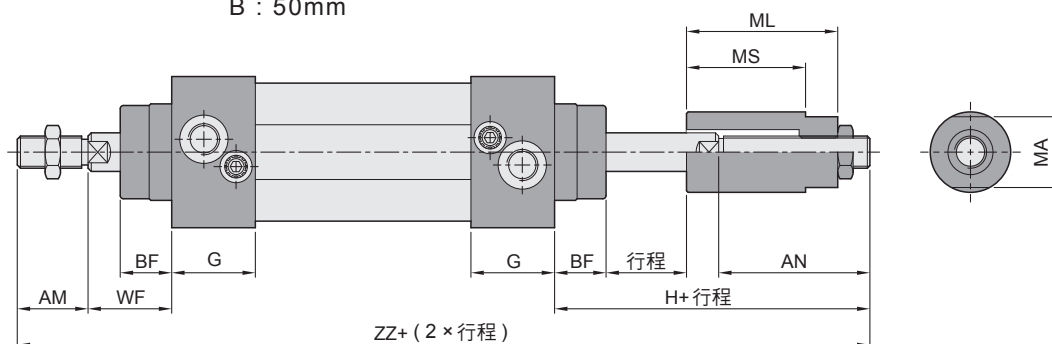

缸徑	記號	AM	AN		BF	G	H		MA	ML		MS		WF	ZZ		Z1	ZM	ZX
			A	B			A	B		A	B	A	B		A	B			
Ø32		22	47	72	16	26	73	98	22	47	72	35	60	26	215	240	94	146	190
Ø40		24	48	73	20	30	78	103	27	47	72	37	62	30	237	262	105	165	213
Ø50		32	52	77	25	30	89	114	36	53	78	38	63	37	264	289	106	180	244
Ø63		32	52	77	25	32	89	114	36	53	78	38	63	37	279	304	121	195	259
Ø80		40	58	83	32	38	104	129	46	60	85	40	65	46	318	343	128	220	300
Ø100		40	58	83	35	40	104	129	46	60	85	40	65	51	333	358	138	240	320
Ø125		54	75	100	40	45.2	135	160	56	70	95	50	75	60	409	434	160	280	388
Ø160		72	80	105	55	50	160	185	60	75	100	55	80	80	492	517	180	340	484
Ø200		72	80	105	65	50	170	195	60	75	100	55	80	95	517	542	180	370	514

法蘭式固定型 - FA 前端固定型 FB 尾端固定型

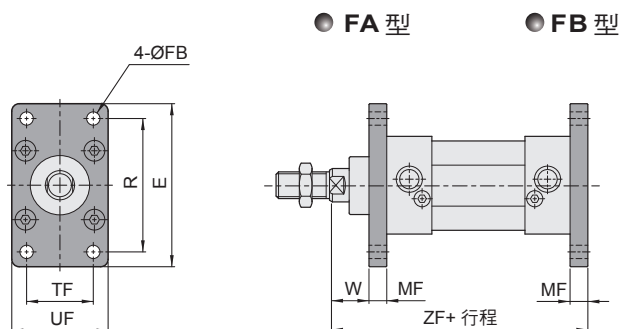

缸徑	記號	E	FB	MF	R	TF	UF	W	ZF
Ø32		79	7	10	64	32	50	16	130
Ø40		90	9	10	72	36	55	20	145
Ø50		110	9	12	90	45	65	25	155
Ø63		120	9	12	100	50	75	25	170
Ø80		153	12	16	126	63	95	30	190
Ø100		178	14	16	150	75	115	35	205
Ø125		210	16	20	180	90	140	40	240
Ø160		280	18	20	230	115	180	60	280
Ø200		320	22	25	270	135	220	70	300